

LED Linear Strip Light



Features

DLC cULus listed;

AC120-347V, Ra>80

2835 SMD LED

High efficacy 140lm/w

0-10V Dim

2FT 4FT 8FT optional

Perfect lighting effect, no dark area

Emergency backup and sensor optional

Easy installation, suspending mounting & surface mounted

5 years warranty

Environment temperature: -20 ~45


Application:

- Industrial
- Warehouse
- Garages
- Workshops
- Commercial





Removable plate
for connecting easily



3 CCT
(3000K/4000K/5000K)
Adjustable



0-10V
DIMMABLE



Linkable



Wattage Adjustable
In same dimension

AC120-277V/347V

2FT 4 FT 8 FT Length

Built in Microwave Sensor

PC Lens changeable



Round PC Lens



Square PC Lens

Parameters


Model #	Size	Power	Efficacy	Lumen	Input voltage	Beam Angle	CRI	CCT
JN-SLP2FTP18-XXK-Y	2FT	18W	130LM/W	2340LM	AC120-347V	120°	>80	3000K 4000K 5000K
JN-SLP4FTP22-XXK-Y		22W		2860LM				
JN SLP4FTP36-XXK-Y	4FT	36W		4680LM				
JN-SLP4FTP40-XXK-Y		40W		5200LM				
JN-SLP8FTP68-XXK-Y	8FT	68W		8840LM				
JN-SLP8FTP80-XXK-Y		80W		10400LM				

Ordering Guide

For example: XSY-SLXFTPXX-XXK-Y

Brand	Product name	Length	Power	CCT	Type
JN	SLP	XFT	PXX	XXK	Y
JN	SLP	2FT 4FT 8FT	18W 22W 36W 40W 68W 80W	3000K 4000K 5000K	A Type A B Type B

Dimension

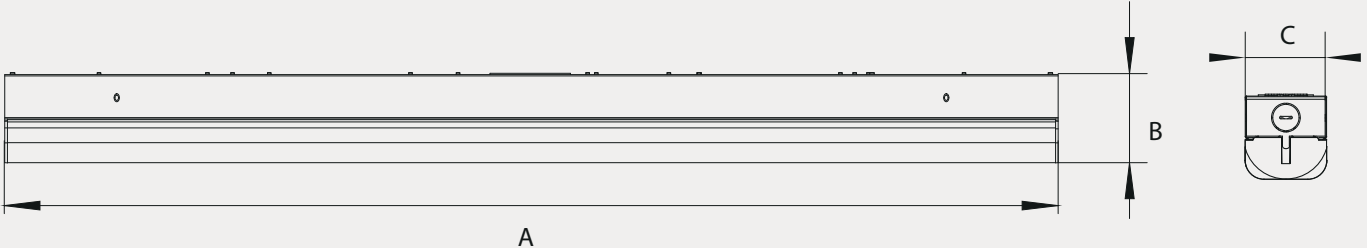


Length \ Size	A	B	C
2FT	23.98''	2.62''	2.56''
4FT	47.99''	2.62''	2.56''
8FT	95.98''	2.62''	2.56''


Installation

ALWAYS TURN OFF THE POWER SUPPLY FROM MAIN CIRCUIT BREAKER FIRST!


Installation mode 1

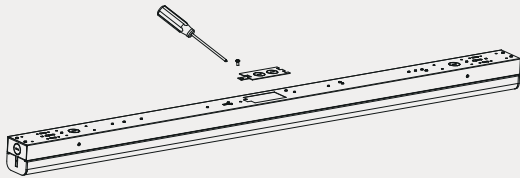


1. Remove the outlet cover with a tool

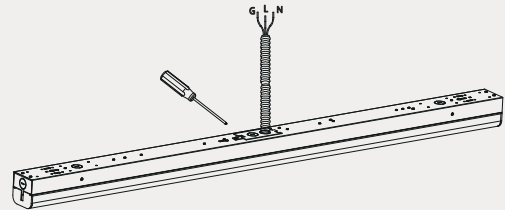


2. Put the input line through the outlet cover plate, Then lock the outlet cover with a tool

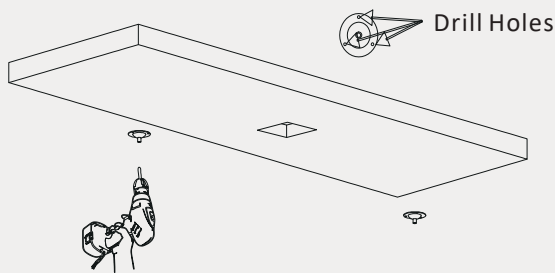


3. Drill three mounting holes in the wall for the retaining disc

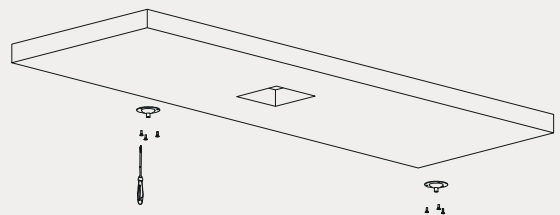

4. Screw the retaining disc to the wall

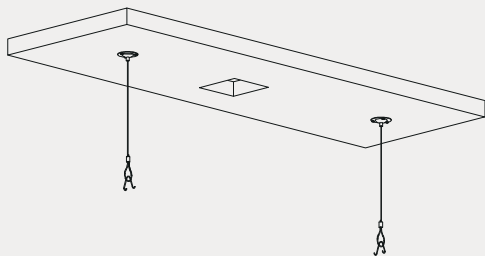


5. Install the sling and hook onto the fixing plate

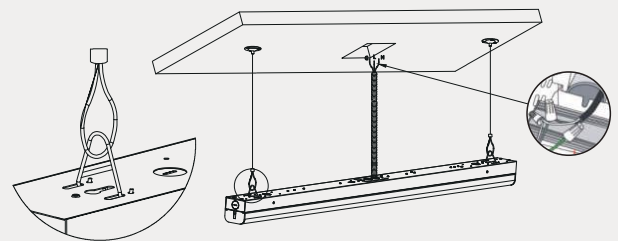


6. Hang the lamp on the hook and connect the connecting hose to the junction box, Connect the wires:
AC/L match black; AC/N match white;
PC/green match ground


Installation mode 2




1. Pull the part of the lampshade down by hand

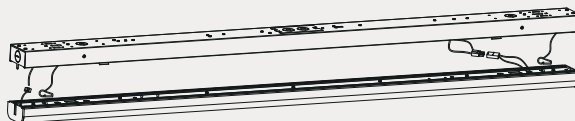


2. Untie the steel wire safety rope, Then untie the male female plug-in terminal and ground terminal

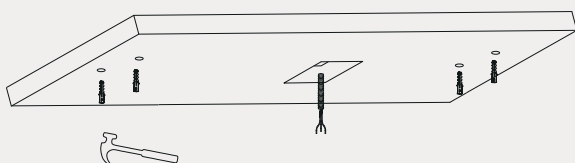


3. First drill with tools, Then fix the expansion pipe to the ceiling with tools

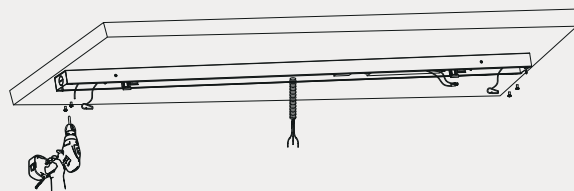


4. First put the wire through the outlet cover plate, Fix the bottom shell to the wall with tools

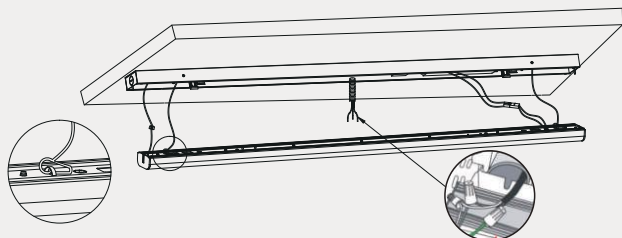

5. Hook the lamp cover with safety wire rope and plug in the plug-in terminal and ground terminal, Connect the wires: AC/L match black; AC/N match white; PC/green match ground



6. Press the lamp cover part in, fix it completely

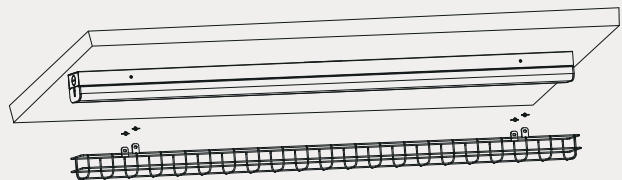


7. Put in the protective net cover, tighten the screws by hand




8. installation is complete

Wiring diagram

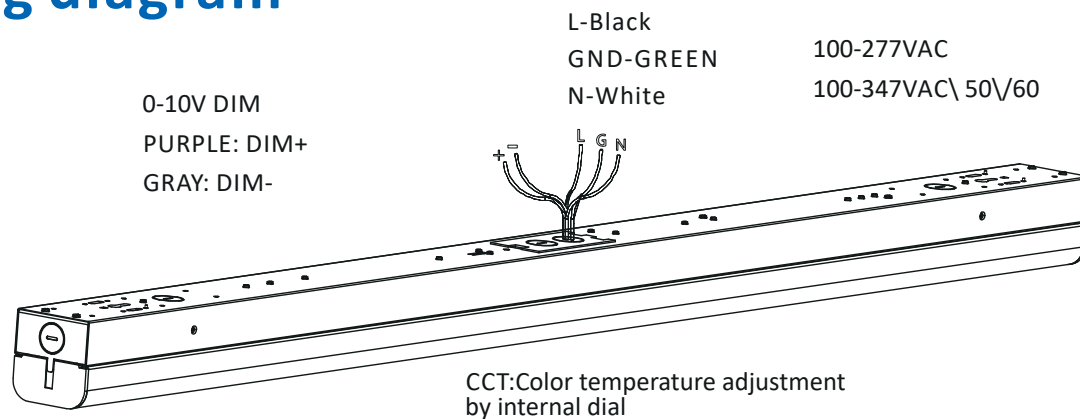

Package Info.

Model	Carton Dimension	Qty / Carton	N.W	G.W
2FT	25.3"*6.14"*6.14"	4PCS	6lbs	7.38lbs
4FT	49.29"*6.14"*6.14	4PCS	14.8lbs	15.43lbs
8FT	97.32"*7.08"*6.45"	4PCS	28lbs	30.86lbs

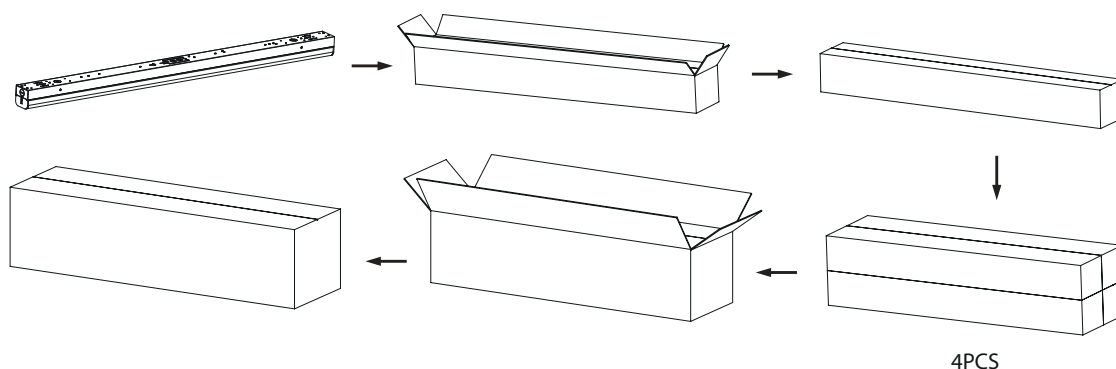

Safety Precaution

To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.

Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions. Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.

For The installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.

To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

WARNING: RISK OF FIRE OR ELECTRICAL SHOCK

Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.

Turn off the power when you perform any maintenance.

Verify that supply voltage is correct by comparing it with the luminaire label information.

Make all electrical and grounded connections in accordance with the National Electrical Code and any applicable local code requirements.

All wiring connections should be capped with UL approved wire connectors.

CAUTION: RISK OF INJURY

Avoid direct eye exposure to the light source while it is on.

Account for small parts and destroy packing material, as these may be hazardous to children.