


FLOOD LIGHT

FL52A

PHOTOMETRIC

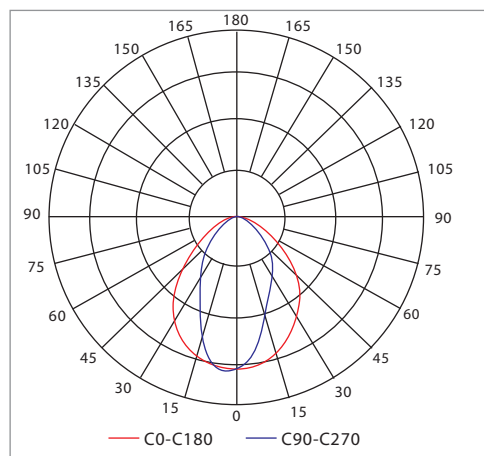

PRODUCT PARAMETERS

BASIC MODEL	VOLTAGE (V)	WATT (W)	5000K EFFICACY (LM/W)	5000K LUMENS (LM)	BEAM ANGLE (H-V)	REPLACE	DIMMING	CRI	POWER FACTOR	AVAILABLE CCT (K)
FL52A-50	120-277	50	140	7,000	100°-60°	100-150W HID	N/A	>70	>0.92	4000 5000
FL52A-75	120-277	75	135	10,125	100°-60°	150-250W HID				
FL52A-95	120-277	95	128	12,160	100°-60°	250-400W HID				

DIMENSION Inch(mm)



AVAILABLE MOUNTINGS



PACKAGE INFORMATION

MODEL	INNER BOX (MM)	MASTER CARTON (MM)	QTY/CTN	NET WEIGHT (KG)	GROSS WEIGHT (KG)	CUBIC METER
FL52A-50/75	310*315*105	335*360*650	6	15.6	17.1	0.05
FL52A-95	310*315*105	335*360*650	6	15.8	17.3	0.05