



Project Name: _____

Schedule / Date: _____

Notes: _____



ETL No.: Intertek **5014001**

DLC Family Code: **YYYFOH**

Improved **Thermal Management**

Flicker Free and Anti-Glare

True **100% OFF 0-10V** Dimming

AUX PIR / DC PnP Microwave **Occupancy** Controls with **Daylight** Sensing, **Customizable** Standby and **Bi-Level** Functionality

ETL Certified for Safety

DLC 5.1 Premium Rated for Efficiency

CRI: **83** (Upgraded Color Rendering Index)

Warranty: **5 Years**

ORDERING GUIDE

SERIES	CATEGORY	SIZE	WATTAGE	CCT	SENSOR	VOLTAGE
JL	BPL Back-lit Panel	14 1x4' 22 2x2'	ZZ Tunable	CCT Tunable	Blank None S Sensor	VL 120-277V VH 120-347V
			15 15w	35 3500k		
			20 20w	40 4000k		
			25 25w	50 5000k		
			30 30w	57 5700k		
			40 40w	65 6500k		

EXAMPLE: **JL-BPL22-ZZW-CCT-S-VL**

JL	BPL Back-lit Panel	24 2x4'	ZZ Tunable	CCT Tunable	Blank None S Sensor	VL 120-277V VH 120-347V
			25 25w	35 3500k		
			30 30w	40 4000k		
			35 35w	50 5000k		
			40 40w	57 5700k		
			50 50w	65 6500k		

EXAMPLE: **JL-BPL24-ZZW-CCT-S-VL**



Project Name: _____

Schedule / Date: _____

Notes: _____

SPECIFICATIONS

SKU	53-2060-XX					53-2062-XX					53-2061-XX				
MODEL NO.	JL-BPL22-ZZW-CCT-S-[VL,VH]					JL-BPL14-ZZW-CCT-S-[VL,VH]					JL-BPL24-ZZW-CCT-S-[VL,VH]				
Brand	Kinlight					Kinlight					Kinlight				
Size	2' x 2'					1' x 4'					2' x 4'				
Wattage	15w	20w	25w	30w	40w	25w	30w	35w	40w	50w	25w	30w	35w	40w	50w
Efficacy	132.28 LPW					138.08 LPW					138.08 LPW				
Luminous Flux	2098	2800	3480	4160	5291	3526	4230	4914	5603	6904	3526	4230	4914	5603	6904
Input @120V	131mA	175mA	219mA	263mA	350mA	219mA	263mA	307mA	350mA	438mA	219mA	263mA	307mA	350mA	438mA
12Vdc Output	Max Current 200mA					Max Current 200mA					Max Current 200mA				
Color Temp.	3500K 4000K 5000K 5700K 6500K					3500K 4000K 5000K 5700K 6500K					3500K 4000K 5000K 5700K 6500K				
Input Voltage	AC120-277V, 50/60Hz					AC120-277V, 50/60Hz					AC120-277V, 50/60Hz				
Dimmable	0-10V (True Off)					0-10V (True Off)					0-10V (True Off)				
CRI	83					83					83				
Beam Angle (°)	110°					110°					110°				
THD	≤20%					≤20%					≤20%				
Flicker	No Flicker					No Flicker					No Flicker				
Power Factor	≥0.9					≥0.9					≥0.9				
IP Rate	IP20 - Indoor					IP20 - Indoor					IP20 - Indoor				
Working Temp.	-20°C ~ +55°C / -4°F ~ +131°F					-20°C ~ +55°C / -4°F ~ +131°F					-20°C ~ +55°C / -4°F ~ +131°F				
Storage Temp.	-40°C ~ +60°C / -40°F ~ +140°F					-40°C ~ +60°C / -40°F ~ +140°F					-40°C ~ +60°C / -40°F ~ +140°F				
Lifespan	50,000h					50,000h					50,000h				
Pcs/Carton	4					4					4				
Package Dims	24.80" x 24.80" x 5.71"					48.82" x 13.78" x 5.91"					48.82" x 24.80" x 5.71"				
Weight	17.88lbs					20.26lbs					33.69lbs				

DLC Number

Size Wattage	2 x 2'	1 x 4'	2 x 4'
15	S-1ND3ST	S-HZSQBW	/
20	S-UXMDVE	S-CFK25J	/
25	S-QV5WEF	S-BKHT6M	S-XDRIJ9
30	S-OKSPQG	S-JM6RF3	S-H4LPQ8
35	/	/	S-YI48U1
40	S-N5B8JO	S-SCMXWU	S-JSOTUG
50	/	/	S-YXAT3K



Project Name: _____

Schedule / Date: _____

Notes: _____

PRODUCT AND CARTON DIMENSIONS


SIZE SKU	DIAGRAM	DIMENSIONS
2x4 53-2061-XX		PRODUCT 47.76 " x 23.74 x 1.38" 7.17 LBS 1 Pcs CARTON 48.82" x 24.80" x 5.71" 33.69 LBS 4 Pcs
2x2 53-2060-XX		PRODUCT 23.74 " x 23.74 x 1.38" 3.75 LBS 1 Pcs CARTON 24.80" x 24.80" x 5.71" 17.88 LBS 4 Pcs
1x4 53-2062-XX		PRODUCT 47.76 " x 11.93 x 1.38" 4.17 LBS 1 Pcs CARTON 48.82" x 13.78" x 5.91" 20.26 LBS 4 Pcs

PALLET & CONTAINER LOADING

SIZE SKU	WEIGHT	LENGTH	WIDTH	HEIGHT	40' HQ LOADING QTY.
2x2 53-2060	643.68 LBS	50.79"	37.80"	81.10"	4560pcs
2x4 53-2061	606.42 LBS	49.61"	37.80"	81.10"	2280pcs
1x4 53-2062	648.32 LBS	49.61"	37.80"	78.60"	3940pcs


2' x 2'

36ctns/144pcs

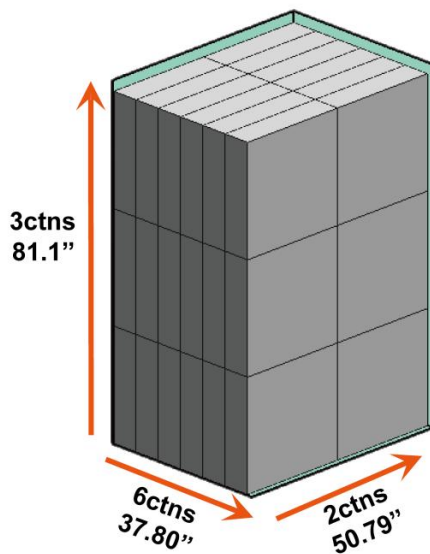


2' x 4'

18ctns/72pcs

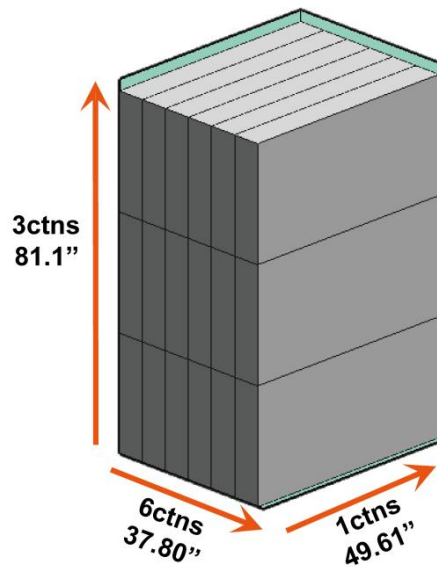

1' x 4'

32ctns/128pcs

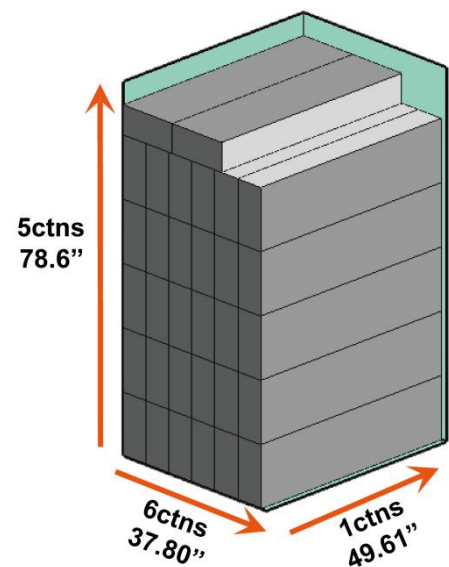

The above simulation diagram does not calculate the height and weight of the pallet, and the size and weight information will be slightly different from the actual situation.



Project Name: _____

Schedule / Date: _____

Notes: _____

ACCESSORIES

SKU	DESCRIPTION	ITEM
39-2010S	AUX Sensor Daylight Bi-Level Standby	
78-20177-A	DC PnP Sensor Daylight Bi-Level Standby	
78-20178-A	Remote with display	
53-2089A	Hanging Cable Kit	
53-2091A	2x4' Surface Mount Kit	
53-2090A	2x2' Surface Mount Kit	
53-2092A	1x4' Surface Mount Kit	
53-2093A	Junction Box	
53-2094F	2x4' Flange Kit	
53-2093F	2x2' Flange Kit	
53-2095F	1x4' Flange Kit	

INSTALLATION INSTRUCTIONS

Safety Instruction:

Basic safety precautions should always be followed when installing, including the following:

1. Read instructions carefully before installing.
2. This LED Panel requires professional installation and maintenance.
3. The power supply of the LED Panel should be powered by a dedicated external LED driver.
4. Disconnect the power supply before installing or maintenance.
5. Make sure the wires have been properly connected before powering on the device.
6. Ensure the product has enough space for heat dissipation.
7. Ensure the luminaries are never covered by any heat insulation mat or slim layer material at anytime.
8. Suitable for damp locations.
9. Ambient Temperature: -20°C to + 45°C, Avoid direct sunlight.
10. Storage Conditions: Cool & dry conditions.

Installation Procedure


WARNING:

1. Switch off before installation.
2. Switch on only after complete installation and examination of the circuit.




CAUTION:


Make sure that the mounting surface or structural member used for installation can support the weight of LED Panel.

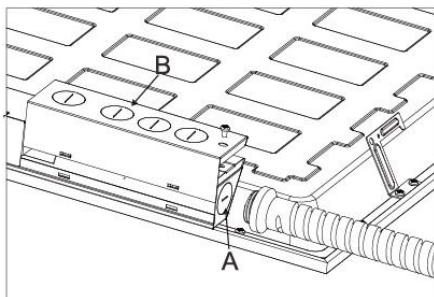

- (1) Remove the knock-down hole on box by screwdriver (Part A), Remove screw and take out the driver cover (Part B)

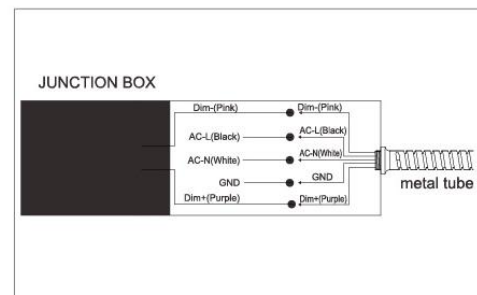


- (2) Connect the wire as the picture showing.

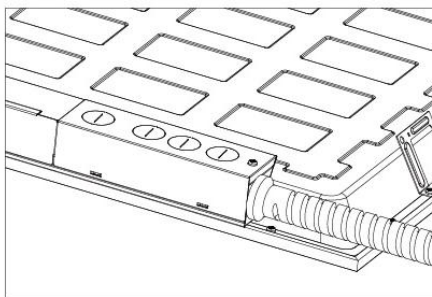


- (3) Cover the driver box and tighten it with a screwdriver, finish connection.

For the product with Slide Switch of CCT or power selection, please select the CCT or power needed before installation. (Ignore these steps if without the function)

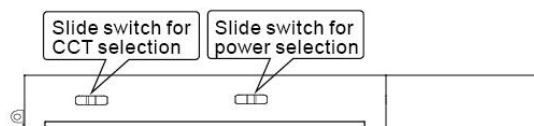


■ Recessed:

1

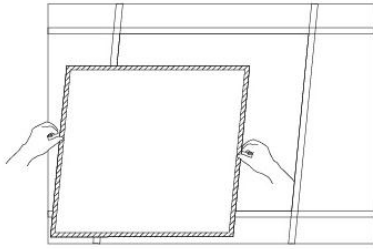


Remove the ceiling plaster slab.

2




Feed the main AC wire in driver terminal block respectively, connect the panel light and driver.

3



Fix the panel light into plaster ceiling.


4



Make sure the led panel light is firmly fixed, turn on the power.


■ Suspended

1

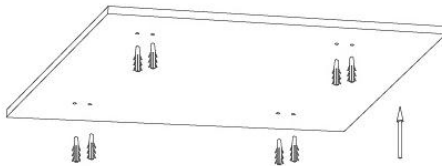


Fix the anchor into target place on the ceiling.

2

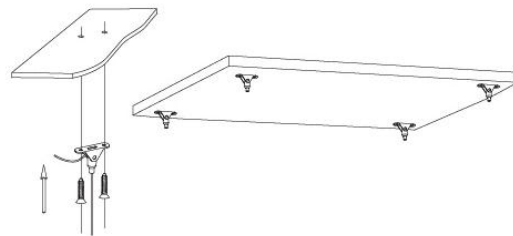


Fix the installation mount on the ceiling with plastic anchor.

3



Hang the panel to ceiling with suspended installation kits, adjust the length of steel wires.


4



Feed the main AC wire in driver terminal block respectively, turn on the power.


■ Surface mounted

1

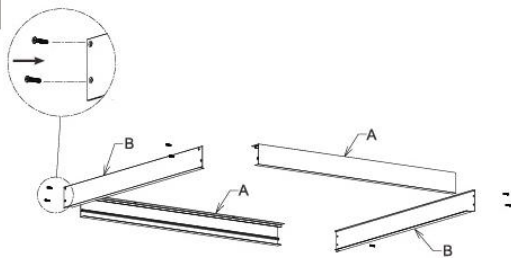


Assemble the surface mounted frame and fix by screws.

2

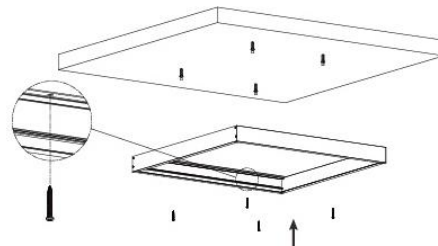


Knock the plastic anchor into ceiling, fix the surface mounted frame on the ceiling by screws.

3

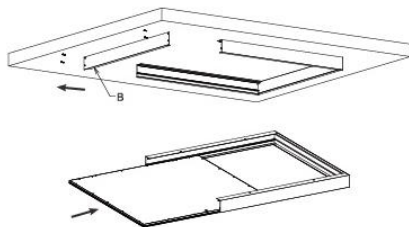


Unscrew the side frame then take out, connect the panel light to power supply, insert the panel light into the frame.

4

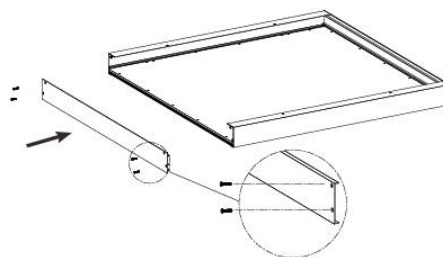

Fix the side frame back by screw.


5

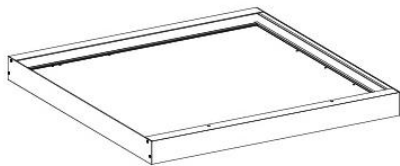


Make sure the frame and panel light are firmly fixed, turn on the power.

Recessed Mounting(Clips)

1

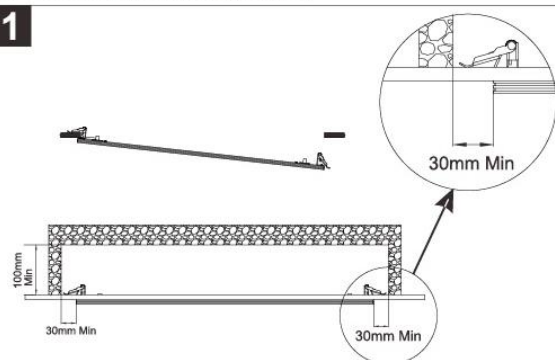

2

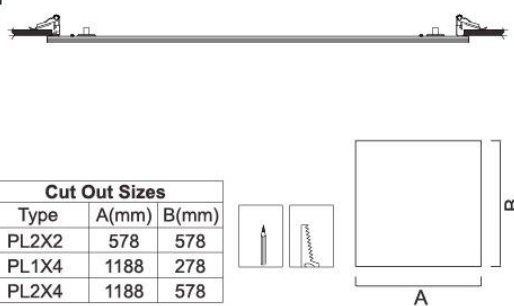



Clips can be purchased separately as an accessory.

Warning:

Input wire diameter $\geq 0.75\text{mm}^2$;

Product modification and improper installation are not valid for warranty!


Audio jack PIR sensor



Audio Jack DC Sensor base.
PIR sensor purchased separately.


Built-in motion sensor

1



The cover plate on the back is reserved for the back wiring installation of DC sensor.


2



Driver box plate


If the user needs to install the sensor, the sensor cover and driver box plate should be removed first.

3

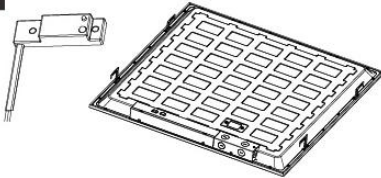

Before installing the sensor, connect the terminal wire of the sensor with the terminal wire of driver output. Then aim the sensor at the hole of the sensor and put it on the back plate.

4

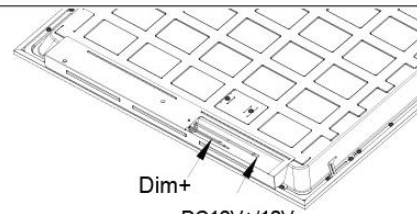

Dim+
DC12V+/12V-

Sensor Dim+(purple)
Sensor Dim-(yellow)
Sensor DC12V+(red)

