


Wall Pack Light

WP01B



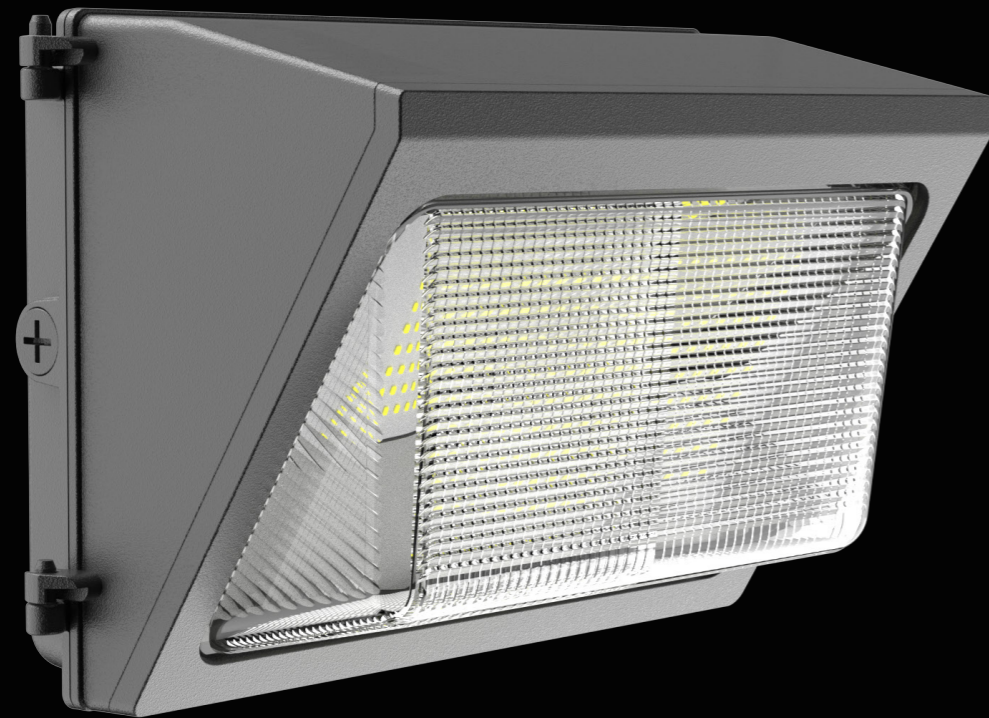


PARAMETERS


MODEL	WATT (W)	LEDs	VOLTAGE (V)	5000K EFFICACY (LM/W)	5000K LUMENS (LM)	BEAM ANGLE (H-V)	DIMMING	CRI	POWER FACTOR	AVAILABLE CCT(K)
WP01B-40	40	3,030	120-277	140	5,600	110°×105°	0-10V	>75	>0.92	3000K/4000K/5000K
WP01B-60	60	3,030	120-277	140	8,400	110°×105°	0-10V	>75	>0.92	3000K/4000K/5000K
WP01B-60W	60/40/25/20 Tunable	3,030	120-277	140	8,400/5,600/3,500/2,800 Tunable	110°×105°	0-10V	>75	>0.92	3000K/4000K/5000K
WP01B-80	80	3,030	120-277	140	11,200	110°×105°	0-10V	>75	>0.92	3000K/4000K/5000K
WP01B-80W-MC	80/60/40/25 Tunable	3,030	120-277	140	11,200/8,400/5,600/3,500 Tunable	110°×105°	0-10V	>75	>0.92	3000K/4000K/5000K Tunable
WP01B-100	100	3,030	120-277	140	14,000	110°×105°	0-10V	>75	>0.92	3000K/4000K/5000K
WP01B-120	120	3,030	120-277	140	16,800	110°×105°	0-10V	>75	>0.92	3000K/4000K/5000K
WP01B-120W	120/100/80/60 Tunable	3,030	120-277	140	16,800	110°×105°	0-10V	>75	>0.92	3000K/4000K/5000K
WP01B-120W-MC	120/100/80/60 Tunable	3,030	120-277	140	16,800	110°×105°	0-10V	>75	>0.92	3000K/4000K/5000K Tunable

Note: Not all products are DLC 5.1 listed, pls contact sales for confirmation.

DIMENSIONS Inch(mm)

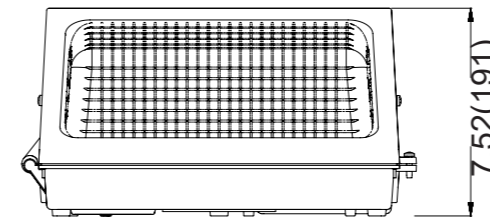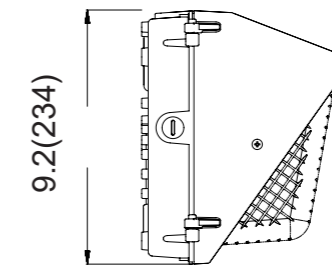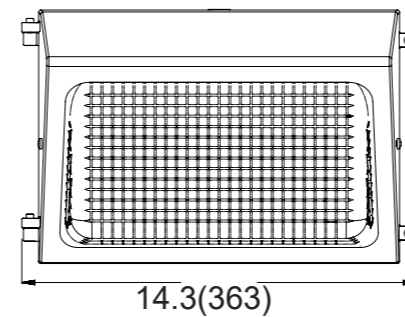

PHOTOMETRICS

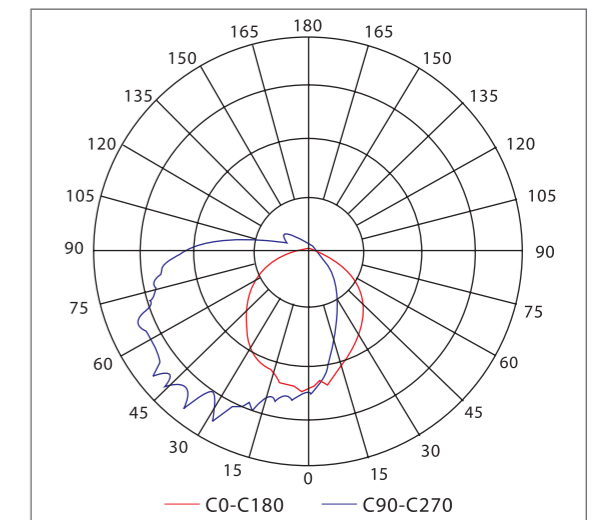

PRODUCT VIEWS

