


WALL PACK LIGHT

WP07A

PHOTOMETRIC





0-15°-30°-45° Adjustable

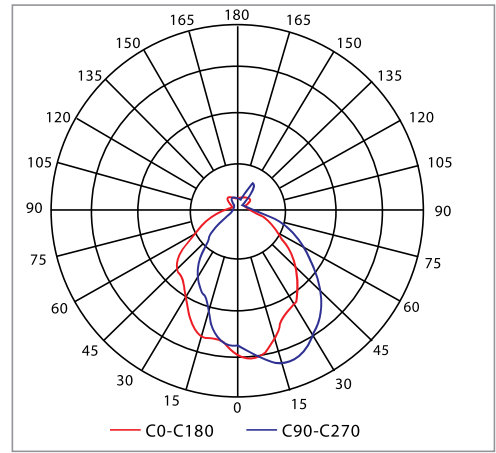

PRODUCT PARAMETERS

MODEL	VOLTAGE (V)	WATT (W)	4000K EFFICACY (LM/W)	4000K LUMENS (LM)	BEAM ANGLE (H-V)	REPLACE	DIMMING	CRI	POWER FACTOR	AVAILABLE CCT (K)
WP07A-30	120-277	30	131	3930	100°*80°	70-100W HID	N/A	>75	>0.92	4000 5000
WP07A-50	120-277	50	132	6600	100°*80°	100-175W HID	Available			

DIMENSION Inch(mm)




INSTALLATION



PACKAGE INFORMATION

MODEL	INNER BOX (MM)	MASTER CARTON (MM)	QTY/CTN	NET WEIGHT (KG)	GROSS WEIGHT (KG)	CUBIC METER
WP07A-30	288*183*158	594*380*240	6	13.6	15.4	0.06
WP07A-50	288*183*158	594*380*240	6	14.6	16.4	0.06

OPTIONAL ACCESSORIES



10KV SPD
120-277V
or 347-480V



BUTTON STYLE
PHOTOCELL
120-277V



DIMMABLE MOTION
SENSOR
120-277V