


Remote For ON/OFF Sensors

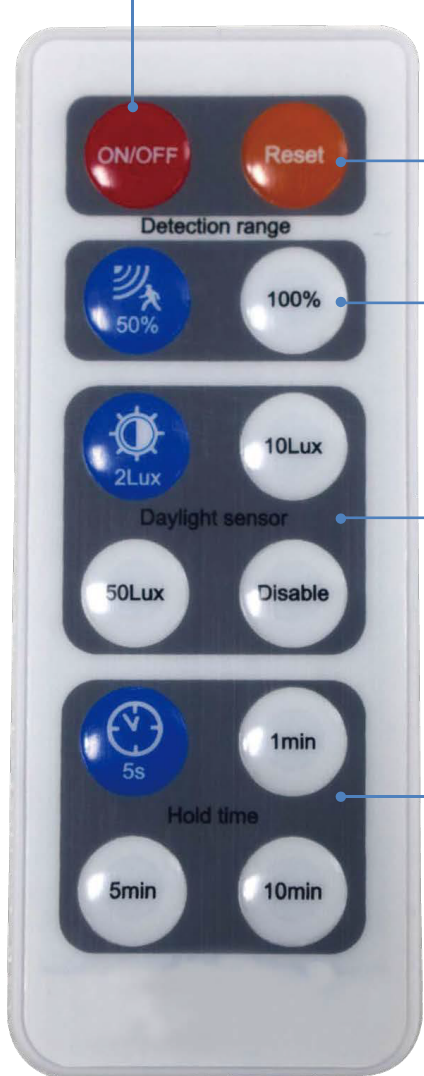

On/off

1. "ON/OFF" key only functions as a switch of the light.
2. If press this button to turn off the lamp before it's short-circuited, the lamp will remain off after power-on again.

Reset

Press "Reset" button, products with DIP switch will be again controlled by DIP switches; otherwise all the setting will be just initial, that is 100% detection range, hold time 5S, daylight threshold disabled.

Detection area

(Press 50%/100% button to define detection area.)

Daylight threshold

(Press 2lux/10lux/50lux/disable to define daylight level.)
Note: Disable means light will be turned on once sensor detects movement, regardless of the ambient lux.

Hold time

(Press 5s / 1min / 5min / 10min to define holdtime.)

SKU: 44-33008-A

Attention

1. Please press "Reset" first if you want to change any setting.
2. When press any button, the light will flicker, it means the setting was recorded by the sensor.