

FEATURES

- 22 Gauge metal housing with matt white paint
- Smooth PMMA cover lens
- High efficacy meets DLC premium;
- PC endcaps, quick-connector adaptor for continuous-run mounting
- Lens & LED board build-in-one design
- Suspension and surface mount option
- 5 Year warranty



APPLICATIONS

- Parking lot
- Supermarket
- Corridor
- Retail spaces
- Warehouses

ORDERING INFORMATION

Name	Length	Wattage	Dimming	Driver	CCT	Backup	Sensor
MLSN	2:2FT	22	/D10:0-10V	/U:120-277V	/30:3000K	Blank: None	Blank: None
	4:4FT	22/34/44		/W:120-347V	/35:3500K	/EM: Emergency	/MS: Motion
	8:8FT	44/58/68/80/96			/40:4000K	Battery	Sensor
					/50:5000K	Backup	

Example: **MLSN4-34/D10/U/40/MS**

(34W 4FT 120-277V 4000K with motion sensor)

SPECIFICATIONS

SHANGHAI HONGBAO LIGHTING CO.,LTD

NO.888, EAST HUIWANG ROAD, JIADING DISTRICT, SHANGHAI TEL: +86 21 31275320 FAX: +86 21 31272277

Model	MLSN2	MLSN4	MLSN8
Wattage	22W	22/34/44W	44/58/68/80/96W
Voltage	120-277V 120-347V	120-277V 120-347V	120-277V 120-347V
LM/W	>130 @4000K		
CCT	3000K/3500K/4000K/5000K		
CRI	>80		
L70/L90	100,000/4,0000h		
Beam Angle	120°		
Dimension(mm)	590*65.5*68.8	1190*65.5*68.8	2364*65.5*68.8


Note: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.


Specifications subject to change without notice

PHOTOMETRIC DATA

Light Distribution Curve

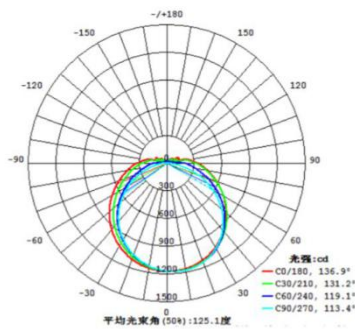

Isolux Plot

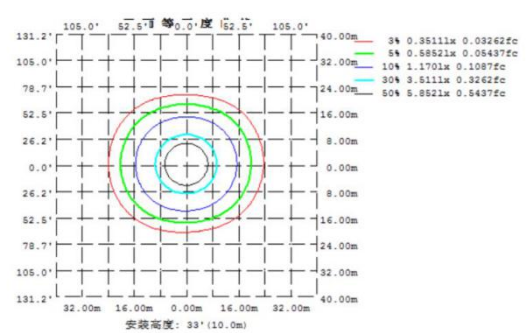

ACCESSORIES

V-Hook	Aircraft cable	Chain	Joiner bracket	Backup pack	Motion Sensor
Included 