




Project Name: _____

Schedule / Date: _____

Notes: _____

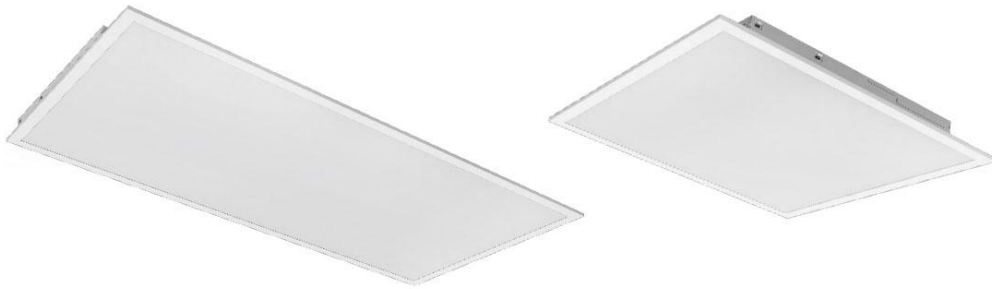

WareLight’s TAA-Compliant Back-Lit LED Flat Panel delivers superior lighting performance with consistent, flicker-free illumination, ideal for commercial and industrial applications. Constructed with a slim, durable frame and advanced back-lit LED technology, this fixture ensures uniform brightness while reducing glare and minimizing shadows. Featuring selectable wattage and color temperature settings, it provides versatile lighting customization for offices, educational institutions, retail environments, and healthcare facilities—all while meeting Trade Agreements Act (TAA) compliance standards.



Project Name: _____

Schedule / Date: _____

Notes: _____

ORDERING GUIDE

Series	Length	Wattage	Color Temperature	Dimming	Compliance
WL-BLPLED	2X2 2X2 Available in 40W	40W-3WS 20/30/40W Selectable	3CCT 35/40/50K Selectable	DM010 0-10V Dimmable	TAA Trade Agreements Act
	2X4 2X4 Available in 50W	50W-3WS 30/40/50W Selectable			

Example: WL-BLPLED-2X2-40W-3WS-3CCT-DM010-TAA

SPECIFICATIONS

CRI	>80
Light Source	LED
Voltage	120-277
Color Temperature	35/40/50K Selectable
Wattage	20-50W Selectable
LPW	125Lm/W
Housing	Aluminum Exterior
Lifespan	50,000H
Ratings and Certifications	ETL and DLC Premium
Dimmable	0-10V
Beam Angle	120°
Mounting Options	Drop Ceiling, Surface Mounted
Operating Temperature	-20°C to 50°C (-4°F to 122°F)
Lumens	2500-6250 Lm
Finish	White
Warranty	5 Year

Performance Chart

Item	Wattage	Lumens	Efficacy	CRI
WL-BLPLED-2X2-40W-3WS-3CCT-DM010-TAA	20/30/40W	2500/3750/5000	125 LM/W	>80
WL-BLPLED-2X4-50W-3WS-3CCT-DM010-TAA	30/40/50W	3750/5000/6250	125 LM/W	>80

Project Name: _____

Schedule / Date: _____

Notes: _____

SPECIFICATIONS

SIZE	DIAGRAM
<p>2x2</p>	<p>The diagram shows a square frame with a height of 23.8" (604mm) and a width of 23.8" (604mm). Below the frame is a cross-section of the profile, which is 1.3" (33mm) high.</p>
<p>2x4</p>	<p>The diagram shows a rectangular frame with a height of 23.8" (604mm) and a width of 47.8". Below the frame is a cross-section of the profile, which is 1.37" (35mm) high.</p>