



Project Name: \_\_\_\_\_

Schedule / Date: \_\_\_\_\_

Notes: \_\_\_\_\_



AC 120-277V

Three(3) Wattage & Five(5) CCT Tunable

Frosted Cover

Seamless linking

Single Color or Adjustable Color

50,000+ Hour lifetime

Suitable for Dry and Damp indoor locations

Operating temperature -4°F to +113°F

ETL Listed

DLC 5.1

Warranty: 5 Years



## ORDERING GUIDE

SERIES	CATEGORY	SIZE	WATTAGE	CCT
JL	INT   Integrate	4FT   4FT	ZZ   Tunable 22   22w 30   30w 40   40w	CCT   Tunable 35   3500k 40   4000k 50   5000k 57   5700k 65   6500k
EXAMPLE: JL-INT-4FT-ZZW-CCT				
JL	INT   Integrate	8FT   8FT	ZZ   Tunable 45   45w 60   60w 72   72w	CCT   Tunable 35   3500k 40   4000k 50   5000k 57   5700k 65   6500k
EXAMPLE: JL-INT-8FT-ZZW-CCT				



Project Name: \_\_\_\_\_

Schedule / Date: \_\_\_\_\_

Notes: \_\_\_\_\_

## SPECIFICATIONS

SKU	53-2608F			53-2609F		
MODEL NO.	JL-INT-4FT-ZZW-CCT			JL-INT-8FT-ZZW-CCT		
Brand	Kinlight			Kinlight		
Size	4FT			8FT		
Wattage	22w	30w	40w	45w	60w	72w
Efficacy	154.6LPW			155.5 LPW		
Luminous Flux	3388	4848	6118	7065	9825	11194
Input @120V	193mA	263mA	351mA	394mA	526mA	631mA
Color Temp.	3500K   4000K   5000K   5700K   6500K			3500K   4000K   5000K   5700K   6500K		
Input Voltage	AC120-277V, 50/60Hz			AC120-277V, 50/60Hz		
Dimmable	0-10V			0-10V		
CRI	82			82		
Beam Angle (°)	120°			120°		
THD	≤20%			≤20%		
Flicker	Flicker			Flicker		
Power Factor	≥0.90			≥0.90		
IP Rate	IP20			IP20		
Working Temp.	-20°C ~ +55°C / -4°F ~ +131°F			-20°C ~ +55°C / -4°F ~ +131°F		
Storage Temp.	-40°C ~ +60°C / -40°F ~ +140°F			-40°C ~ +60°C / -40°F ~ +140°F		
Lifespan	50,000h			50,000h		
Pcs/Carton	25			20		
Package Dims	46.46" x 7.48" x 9.84"			91.34" x 7.87" x 8.07"		
Weight	22.80lbs			36.38lbs		

## DLC Number

Size	4FT					8FT				
Color	3500K	4000K	5000K	5700K	6500K	3500K	4000K	5000K	5700K	6500K
Wattage										
22w	S-01JZ3H	S-MSD92Z	S-UCJKBO	S-NS6C3U	S-PJD1UM	\	\	\	\	\
30w	S-HKQYBS	S-762EOQ	S-YDR7U4	S-HWT9RM	S-I8163V	\	\	\	\	\
40w	S-FPS26H	S-6Z08BYG	S-G57EFR	S-NKGAUE	S-AL5V07	\	\	\	\	\
45w	\	\	\	\	\	S-LRNW0U	S-948BAJ	S-JRXQO2	S-EJLRDG	S-HFV40N
60w	\	\	\	\	\	S-PZ47AR	S-1JVFIC	S-VOK5S4	S-1GOHBF	S-7XLJ95
72w	\	\	\	\	\	S-W6AZJO	S-0EZTYU	S-80LI9A	S-8I4GEJ	S-A5CV9Y

## BRIEF INTRODUCTION

4FT

8FT



Wattage Tunable

CCT Tunable



Wattage Tunable

CCT Tunable

## LINKING

Max of 600W for linking applications at 120V, Max of 1200W for linking applications at 277V

Size	Wattage	Linkable Qty@120V PCS	Linkable Qty@277VPCS
8FT	72w	7	17
	60w	9	20
	45w	12	27
4FT	40w	13	31
	30w	18	41
	22w	25	56

When you need Integrate Linking in different sizes, please refer to below sheets to ensure the brightness of the maximum approximation

8FT	4FT
72w	40w
60w	30w
45w	22w




Project Name: \_\_\_\_\_

Schedule / Date: \_\_\_\_\_

Notes: \_\_\_\_\_

\_\_\_\_\_


## PHYSICAL CHARACTERISTICS

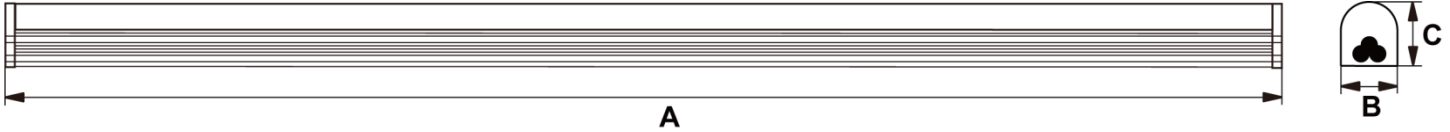

Product Size	A (Body Length)	B (Width)	C (Height)
4FT	45"	1.18"	1.42"
8FT	90"	1.18"	1.42"

SIZE   SKU	LENGTH	WIDTH	HEIGHT	40' HQ LOADING QTY.
4FT   53-2608F	48	40.55	78.74	30000 pcs
8FT   53-2609F	Customized Extra-long pallets			15000 pcs

**35 ctns/875 pcs**

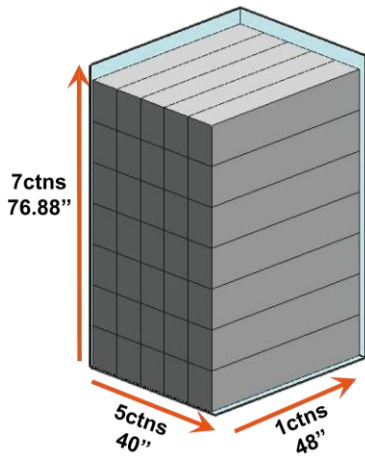





Project Name: \_\_\_\_\_

Schedule / Date: \_\_\_\_\_

Notes: \_\_\_\_\_

\_\_\_\_\_

## ACCESSORIES

SKU	DESCRIPTION	ITEM
53-26W	8FT ON/OFF Cable	
53-26M	Magnet Clips	
53-263	Mounting Clips	
53-264	Single-end Cable	
53-265	Double-end Cable	