



Project Name: _____

Schedule / Date: _____

Notes: _____

Features

22 Gauge metal housing with matt white paint

Smooth PMMA cover lens

High efficacy meets DLC premium;

PC endcaps, quick-connector adaptor for continuous-run mounting

Lens & LED board build-in-one design

Suspension and surface mount option

Warranty: 5 Years



APPLICATIONS

- Parking lot
- Supermarket
- Corridor
- Retail space
- Warehouse

ORDERING GUIDE

Name	Length	Wattage	Dimming	Driver	CCT	Backup	Sensor
MLSN	2 2FT	2' 22w	D10 0-10V	U 120-277V W 120-347U	30 3000K	Blank None EM EBB	Blank None MS Sensor
	4 4FT	4' 22/34/44w			35 3500K		
	8 8FT	8' 44/58/68/80/96w			40 4000K		
					50 5000K		

EXAMPLE: **MLSN4-34/D10/U/40/MS**



Project Name: _____

Schedule / Date: _____

Notes: _____

SPECIFICATIONS

SKU	ZEV-10087		
MODEL NO.	MLSN2	MLSN4	MLSN8
Wattage	22w	22/34/44w	44/58/68/80/96w
Voltage	120-277V, 120-347V		
LM/W	>130@4000K		
CCT	3000K/3500K/4000K/5000K		
CRI	>80		
L70/L90	100,000/4,0000h		
Beam Angle	120°		
Dimension	590*65.5*68.8mm	1190*65.5*68.8mm	2364*65.5*68.8mm

Note:


Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25°C.


Specifications subject to change without notice

PHOTOMETRIC DATA

Light Distrubtion Curve

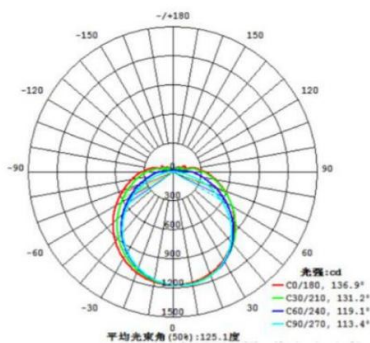

Isolux Plot

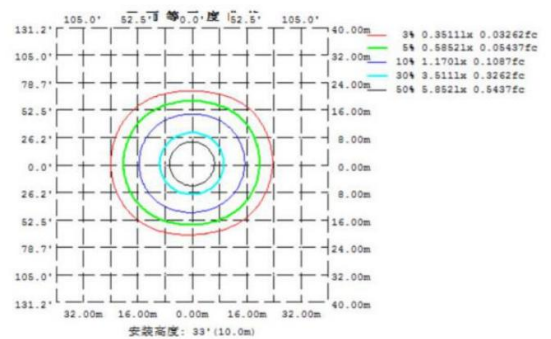





Project Name: _____

Schedule / Date: _____

Notes: _____

ACCESSORIES


SKU	ITEM
V-Hook	<p style="text-align: center;">Included</p> 
Aircraft cable	
Chain	
Joiner bracker	

Project Name: _____

Schedule / Date: _____

Notes: _____

Backup pack

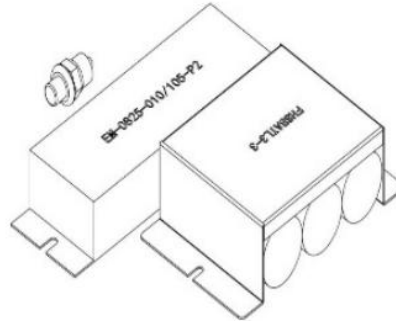

Motion Sensor

