


libulbs

LINEAR LOW BAY

5 CCT / 5 WATTAGE SELECTABLE

COMBINES FLEXIBILITY, PERFORMANCE AND VALUE

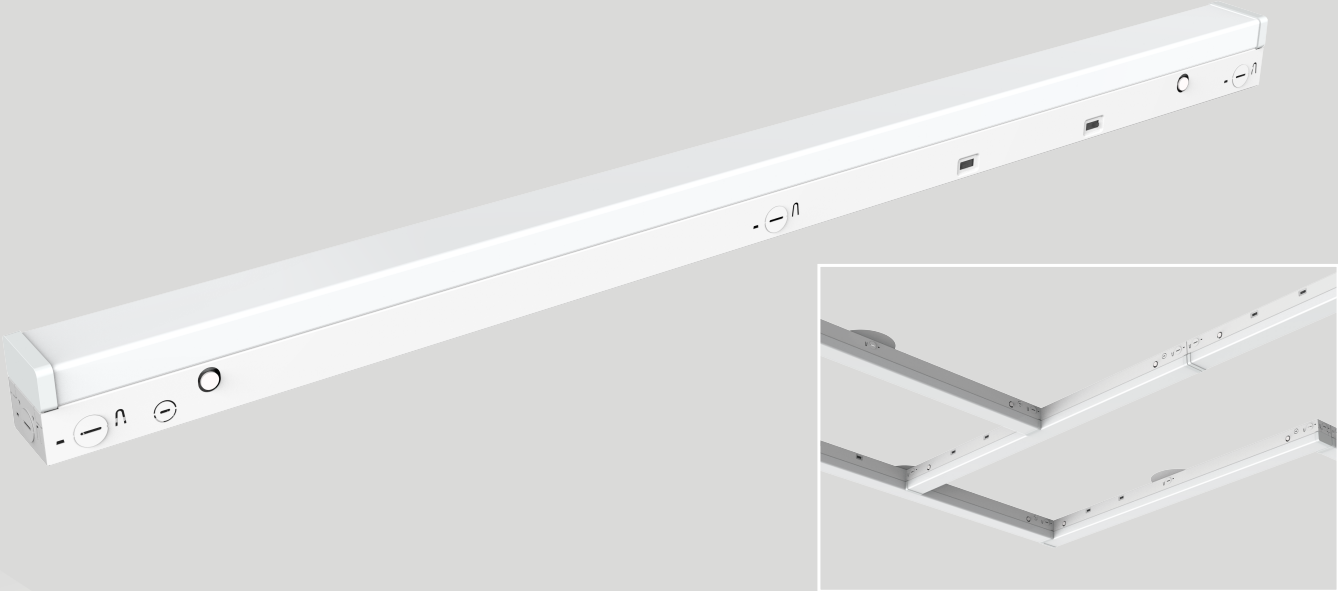

DESIGNED FOR PERFORMANCE & FLEXIBILITY

- ✔

Selectable CCT & Wattage - Easily customize light output and color temperature to meet a widerange of project requirements.
- ✔

Enhanced Visual Comfort - Precision-engineered diffuser minimizes glare and flicker whileproviding smooth, uniform light distribution.
- ✔

Smart Control Ready - Compatible with optional occupancy sensors and emergency backupsystems for added safety and energy savings.
- ✔


0-10V Dimming Standard - Delivers seamless dimming performance for improved comfort,efficiency, and lighting control.
- ✔

Reliable Long-Term Value - Rated for 50,000 hours of operation and backed by a 5-year limitedwarranty.

SELECTABLE CCT



SELECTABLE WATTAGE



CERTIFICATIONS & COMPLIANCE



INDOOR
STRIP LIGHT

SPECIFICATIONS

SKU	53-5502					53-5503				
MODEL NO.	JL-STR-4FT-M45W-CCT-S-[Blank,E]					JL-STR-8FT-M100W-CCT-S-[Blank,E]				
Connect(Max)	10					5				
DLC No.	S-VR6SFX					S-3D4XCX				
Brand	Builderspack					Builderspack				
Size	4FT					8FT				
Wattage	25W	30W	35W	40W	50W	50W	60W	70W	80W	100W
Efficacy	135.6 LPW					135.4 LPW				
Luminous Flux	3390	4068	4746	5424	6780	6770	8124	9478	10832	13540
Input @120V	219mA	263mA	307mA	350mA	438mA	435mA	526mA	614mA	701mA	877mA
12Vdc Output	Max Current 360mA					Max Current 720mA				
Color Temp.	3500K 4000K 5000K 5700K 6500K									
Input Voltage	AC120-277V, 50/60Hz									
Dimmable	0-10V DC									
CRI	>80									
Beam Angle (°)	180°									
THD	≤20%									
Flicker	No Flicker									
Power Factor	≥0.9									
Working Temp.	-20°C ~ +55°C / -4°F ~ +131°F									
Storage Temp.	-40°C ~ +60°C / -40°F ~ +140°F									
Lifespan	50,000h									
Pcs/Carton	4					6				
Package Dims	49.02" x 10.24" x 6.30"					95.47" x 7.09" x 6.30"				
Weight	25.82 lbs					35.89 lbs				

KEY FEATURES AT A GLANCE

120-277V

50,000H LIFESPAN

LOW FLICKER REDUCED GLARE

5 CCT SELECTABLE

5 WATTAGE SELECTABLE

0-10V DIMMABLE

SENSOR OPTIONAL

EMERGENCY OPTIONAL

ACCESSORIES & OPTIONS

Sensor

Emergency Backup

Cover Plates and Screw

Plastic Anchor and Screws

V Hook and Chain Mounting

Remote Control

APPLICATION



DIMENSIONS

