

FEATURES

- 22 Gauge metal housing with matt white paint
- Smooth PMMA cover lens
- High efficacy meets premium;
- Lens & LED board build-in-one design
- Suspension and surface mount option
- Wattage & CCT selectable
- 5 Year warranty
- **DC 12V Auxiliary**



APPLICATIONS

- Parking lot
- Supermarket
- Corridor
- Retail spaces
- Warehouses



ORDERING INFORMATION

Example: **MLSN4-22/28/36/44/D10/U/35-40-50/MS**

Name	Length	Wattage	Dimming	Driver	CCT	Backup	Sensor
MLSN		22	/D10:0-10V	/U:120-277V /W: 120-347	35-40-50	Blank: None	Blank: None
	2:2FT	Or 20/24/28					
	4:4FT	22/28/36/44				Battery Backup	Sensor
	8:8FT	44/58/68					
	8:8FT	48/68/90					

(covers 22/28/36/44W 4FT 120-277V multi-CCT with motion sensor)

SPECIFICATIONS

Model	MLSN2	MLSN4	MLSN8
Wattage	(Cover 22W) (Cover 20/24/28)	(covers22/28/36/44W)	(Covers 44/58/68W) (Covers48/68/90W)
Voltage	120-277V 120-347V		
LM/W	>130 @4000K		
CCT	3500K-4000K-5000K		
CRI	>80		
L70/L90	100,000/40,000h		
Beam Angle	120°		
Dimension(mm)	610x68.8x65.5	1183.6x68.8x65.5	2357.6x68.8x65.5


Note: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.


Specifications subject to change without notice

PHOTOMETRIC DATA

Light Distribution Curve

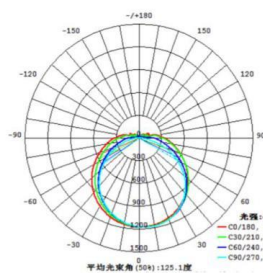

Isolux Plot

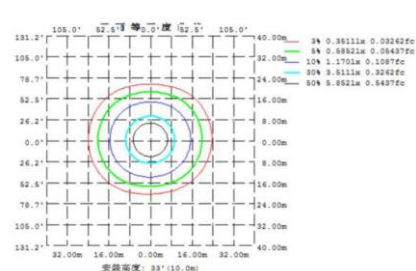

ACC

V-

cable

main

Joiner bracket

Sensor

Included

